




## CONTACT US



PT Indobamboo Lestari (PT IBL) integrates community based sustainable forestry with cutting edge wood modification technology and innovative industrial design to create a sustainable wood product: Strand Woven Bamboo (SWB). Our SWB has the highest specifications of durability and stability due to its unparalleled density and hardness.

With its highly dense bamboo strandwoven beams IBL produces products for an array of applications including:

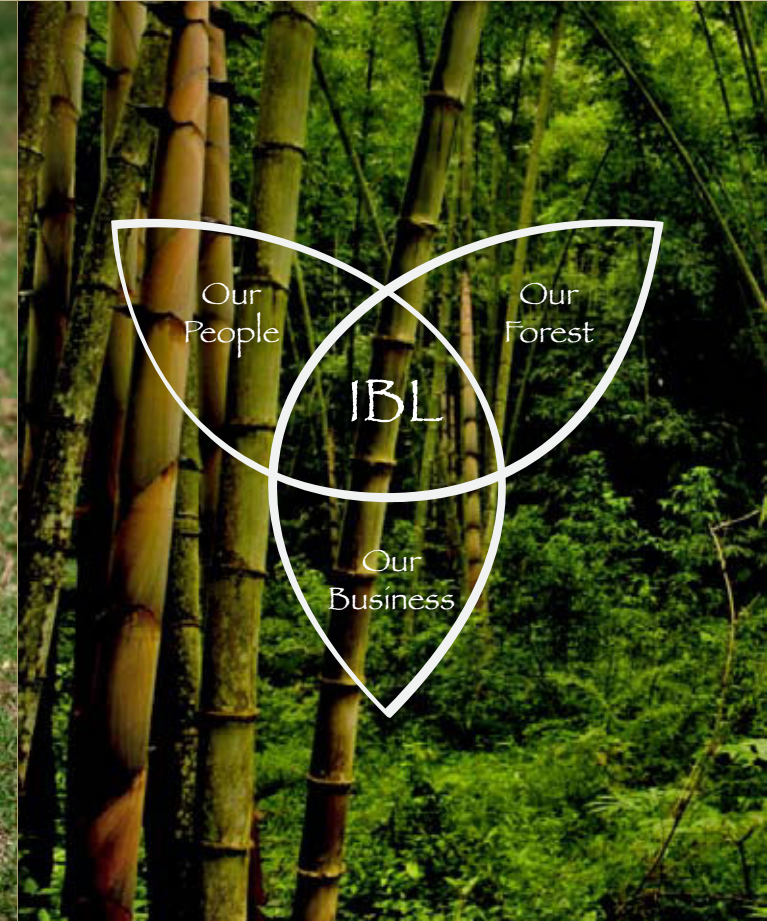

### ADDRESS :

Jln. Gunung Agung, Br. Batur, Ds. Kusamba,  
Dawan, Klungkung – Bali. 80761  
Phone: +62 366 – 30577  
Email: [info@indobamboo.com](mailto:info@indobamboo.com)

[www.indobamboo.com](http://www.indobamboo.com)





## STRAND WOVEN BAMBOO

For thousands of years Bamboo has been used in China and many parts of Asia for a multitude of purposes. It's incredible strength, flexibility and hardness have made it an ideal material used in the building of homes and utilitarian products.

Over the past two decades the Chinese have refined a unique manufacturing process to create what is basically a hardwood out of bamboo. During this process strands of mature bamboo mixed with polymers are subjected to extreme pressure and heat to create an extremely hard and dense substance.

PT Indobamboo Lestari is proud to be the first company to manufacture STRAND WOVEN BAMBOO in Indonesia. Coupling advanced technology and chemistry with a community based sustainable forestry program, we offer domestic and international partners an ecologically "green" alternative for an array of building products requirements.

## PRODUCTS



**Bamboo Beam**, battens and beams of any custom specification smaller than or equal to 15 cm wide, 14.2 cm thick in cross section and 2.4 meters in length.



**Bamboo Veneer** from 1.6-10 millimeters thick.



**Bamboo T&G finished flooring planks or Square edged Bamboo Planks**

- 239.4 x 14.4 x 1.5 cm
- 239.4 x 14.4 x 1.2 cm

## FINISHING



**Klumpp U.V Oil Finish** Indobamboo only apply the highest quality natural oils to ensure durability in our products



**Natural Finish**



**Carbonized Finish**





# Our Workshop & Publishing







**PT. INDOBAMBOO LESTARI**

Br. Batur, Ds. Kusamba, Kec. Dawan,

Kab. Klungkung, Bali – Indonesia 80761. Telp.+62.0366.30577 Email : sales@indobamboo.com

**BAMBOO PRODUCT LIST**

Strand Woven Bamboo (SWB) - *Produk Bambu yg dianyam*

No	Kelompok	Description	Spesification	Unit
1	Flooring	Engineered Flooring (Cross-Laminated Veneer Bamboo) with Scratch Resistant UV Coating Indoor - 3 Layer Thickness (Top 3mm SWB + 8mm SWB Core + Base Layer 3mm SWB)	14mm x 130mm x 2350mm	M <sup>2</sup>
2		Engineered Flooring (Cross-Laminated Veneer Bamboo) with Scratch Resistant UV Coating Indoor - 3 Layer Thickness (Top 3mm SWB + 8mm HDF Bamboo + Base Layer 3mm SWB)	14mm x 130mm x 2350mm	M <sup>2</sup>
3		Engineered Flooring (Cross-Laminated Veneer Bamboo) with Scratch Resistant UV Coating Indoor - 3 Layer Thickness (Top 3mm SWB + 8mm HDF Bamboo + Base Layer 3mm Eco-Wood)	14mm x 130mm x 2350mm	M <sup>2</sup>
4	Wall	Engineered Wall with Scratch Resistant UV Coating Indoor 2 Layer Thickness (Veneer 3mm + Plywood 9mm)	12mm x 130mm x 2350mm	M <sup>2</sup>
5	Ceiling	Engineered Ceiling with Scratch Resistant UV Coating Indoor 2 Layer Thickness (Veneer 3mm + Plywood 9mm)	12mm x 130mm x 2350mm	M <sup>2</sup>
6	Beam / Balok	Unfinish Beam / Balok Smoot Surface	142mm x 150mm x 2400mm	M3 Cubic Pcs
7	Laminated / Gluelam	Laminated / Gluelam Board	As Customer Needs / Sesuai Permintaan	M3 Cubic
8	Veneer	Unfinished Veneer (2mm)	2mm x 135mm x 2400mm	M <sup>2</sup>
9		Unfinished Veneer (3mm)	3mm x 135mm x 2400mm	M <sup>2</sup>
10	Bamboo Plywood / CLT	Cross Laminated Timber (CLT) with HDF - 15mm	15mm x 1200mm x 2400mm	Panel
11		Cross Laminated Timber (CLT) with HDF - 22mm	22mm x 1200mm x 2400mm	Panel
12		Cross Laminated Timber (CLT) with Plywood - 15mm	15mm x 1200mm x 2400mm	Panel
13		Cross Laminated Timber (CLT) with Plywood - 18mm	18mm x 1200mm x 2400mm	Panel
14		Cross Laminated Timber (CLT) with Plywood - 22mm	22mm x 1200mm x 2400mm	Panel
15		Cross Laminated Timber (CLT) with Plywood - 24mm	24mm x 1200mm x 2400mm	Panel

Contact Marketing : William (+62. 812.1769.4800) Telp/SMS/Whatsapp